

EZMarquee - 4 Lines 20 Characters

4 Lines 20 Characters - NEMA 12

The 4 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 4 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity. All 4 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height: 2" / 4" / 6" / 8"
 Characters per Line: 20 / 10 / 6 / 5
 Number of Lines: 4 / 2 / 1 / 1
 Visibility: 100'/200'/300'/400'


4 Lines 20 Characters features:

- 4 lines of 20 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below.



Red Indoor

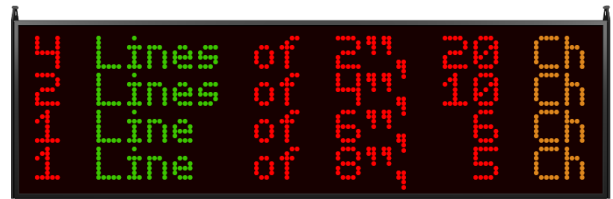

Tri Color Indoor

Model Number	Description
EEZMR-4L20C	RS232 and RS422/485 Only
EZMR-4L20C-E	Ethernet Included
EZMR-4L20C-D	Devicenet Included
EZMR-4L20C-P	Profibus Included

Model Number	Description
EZMT-4L20C	RS232 and RS422/485 Only
EZMT-4L20C-E	Ethernet Included
EZMT-4L20C-D	Devicenet Included
EZMT-4L20C-P	Profibus Included

RED Outdoor Highbright

Model Number	Description
EZMRH-4L20C	RS232 and RS422/485 Only
EZMRH-4L20C-E	Ethernet Included
EZMRH-4L20C-D	Devicenet Included
EZMRH-4L20C-P	Profibus Included

