




## 8 pt. Relay Out Module with built-in Electromagnetic shield

Module Specifications	
Number of Outputs	8
Output Voltage Range	5-30 VDC or 20-250 VAC
Output Type	8 Form C (SPDT)
Output Terminals Consumed	20
Peak Voltage	30 VDC/380 VAC
AC Frequency	47-63 Hz
Maximum Current (resist.)	5A/point
Maximum Leakage Current	0.5mA @ 130 VAC @ 60Hz
Maximum Switching Current	5A
Electromagnetic Shield	2 pF between contact and shield
Dielectric Strength	1000VAC between contacts, 4000VAC between contacts and coil
OFF to ON Response	≤1ms (typical)
ON to OFF Response	≤1ms (typical)
Status Indicators	Red LEDs
Contacts	8 isolated
Base Power Required (5V)	50mA

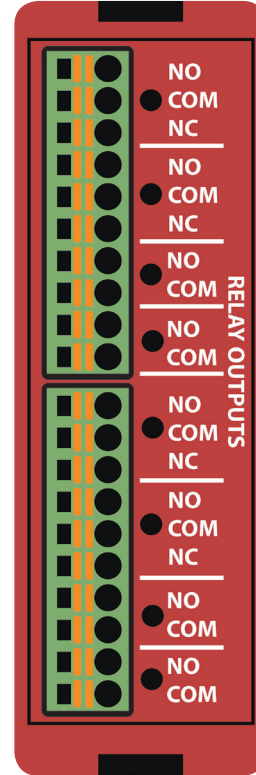

**EZRPL-IO-8RLO**

Pinout Information			
1	Output(1)_Normally open	11	Output(5)_Normally open
2	Output(1)_COM	12	Output(5)_COM
3	Output(1)_Normally close	13	Output(5)_Normally close
4	Output(2)_Normally open	14	Output(6)_Normally open
5	Output(2)_COM	15	Output(6)_COM
6	Output(2)_Normally close	16	Output(6)_Normally close
7	Output(3)_Normally open	17	Output(7)_Normally open
8	Output(3)_COM	18	Output(7)_COM
9	Output(4)_Normally open	19	Output(8)_Normally open
10	Output(4)_COM	20	Output(8)_COM

