


## **E/Z Remote I/O®** **EZRIO-X-32 Specifications**

### **EZRIO 32 I/O features:**

- EZ Remote IO leaves your PLC intact but reduces your IO cost to 1/3rd.
- EZ connectivity and configuration with EtherNet/IP, Modbus TCP/IP, Modbus RTU, DeviceNet, Profibus & EZ Serial and Ethernet protocols
- It allows the Remote system expansion to 2048 IO points with Cube Modules.
- Highest Reliability and Noise Immunity in industry.
- Incredibly compact, 31 different Cube IO modules. 4 12 Bit Analog In, 4 12 Bit Analog Out :
- \*\*Note: 8 pt. I/O to double shortly.
- 74.1% cost savings over CompactLogix I/O in a bench mark comparison of 96 I/O of 48 Digital In, 32 Digital Out, 8 12-bit Analog In,
- 8 12-bit Analog Out. Best Remote I/O for EtherNet/IP, Modbus TCP/IP, Modbus RTU and Profibus.
- Easiest Drag-n-Drop Free Configuration Software.
- 4 of EZRIO Cube I/O for 1 of AB, 2 of EZ RIO Cube I/O for 1 of AutomationDirect.
- Removable Plug-in Terminal blocks for IO.
- Status LED for each I/O in every model
- Better Features and Ratings in every category of IO.

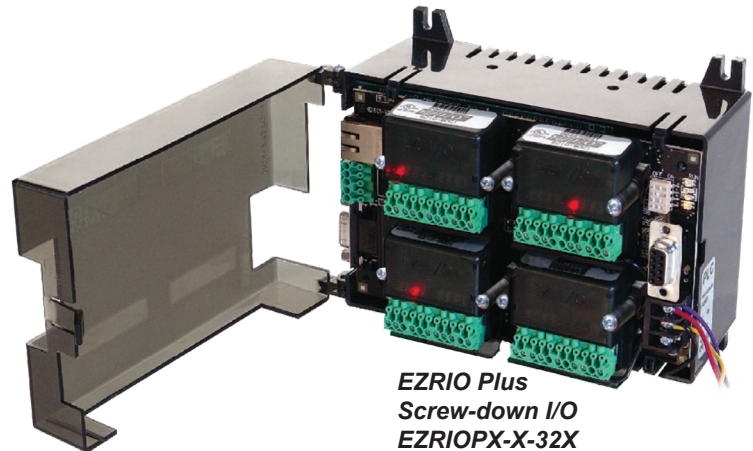

### **MODULES NOT INCLUDED WITH BASE**

| Model Number       | Interface                                                                                                                                                                                                                                    |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EZRIO-A-32</b>  | <b>AC Model – 32 I/O Base</b> comes with RS232 port 1 and RS422/485 port 2, and a Male connector for plugging in DeviceNet or Profibus option cards. Screw-down I/O.                                                                         |
| <b>EZRIO-A-32E</b> | <b>AC Model – 32 I/O Enhanced Ethernet Base</b> comes with RS232 port 1, RS422/485 port 2, Ethernet port 3 and a Male connector for plugging in DeviceNet or Profibus option cards. Screw-down I/O.                                          |
| <b>EZRIO-D-32</b>  | <b>DC Power – 32 I/O Base</b> comes with RS232 port 1 and RS422/485 port 2, and a Male connector for plugging in DeviceNet or Profibus option cards. Screw-down I/O.                                                                         |
| <b>EZRIO-D-32E</b> | <b>DC Power – 32 I/O Enhanced Ethernet Base</b> comes with RS232 port 1, RS422/485 port 2, Ethernet port 3 and a Male connector for plugging in DeviceNet or Profibus option cards. EZRIO has snap-in I/O whereas EZRIOP has screw-down I/O. |

